



because it works



## WIWA DUOMIX 270

HIGH PRESSURE PLURAL COMPONENT SPRAY EQUIPMENT  
FOR HEAVY DUTY COATINGS

[WWW.WIWA.COM](http://WWW.WIWA.COM)

## PRODUCT RANGE



**Head Office and Production Germany**  
WIWA Wilhelm Wagner GmbH & Co. KG

Gewerbestrasse 1-3  
35633 Lahnau  
Phone: +49 6441 609-0  
[www.wiwa.de](http://www.wiwa.de)

### WIWA Subsidiary USA

WIWA LLC – USA, Canada, Latin America  
107 N. Main St.  
P.O. Box 398, Alger, OH 45812  
Tel.: +1-419-757-0141  
Fax: +1-419-549-5173  
Toll-Free: +1-855-757-0141

[www.wiwausa.com](http://www.wiwausa.com)



WIWA FLEXIMIX 2, electronic plural component spray equipment



WIWA DUOMIX, pneumatic plural component spray equipment



WIWA DUOMIX PU HX, hydraulic plural component spray equipment



WIWA DUOMIX 333 PFP ATEX, for intumescent fire protection material



WIWA HERKULES 333 GX, single feed (airless) spray equipment



WIWA VULKAN, pneumatic extrusion equipment

# SETTING THE NEW STANDARD IN POWER AND RELIABILITY

Electronic controls include potlife monitoring, flush program execution, mixing ratio memory and data recording with the **WIWA DATALOGGER**.

Optimized control panel provides ease of operation and conforms to the EU Machine directive with regard to the safety shut-off requirement.

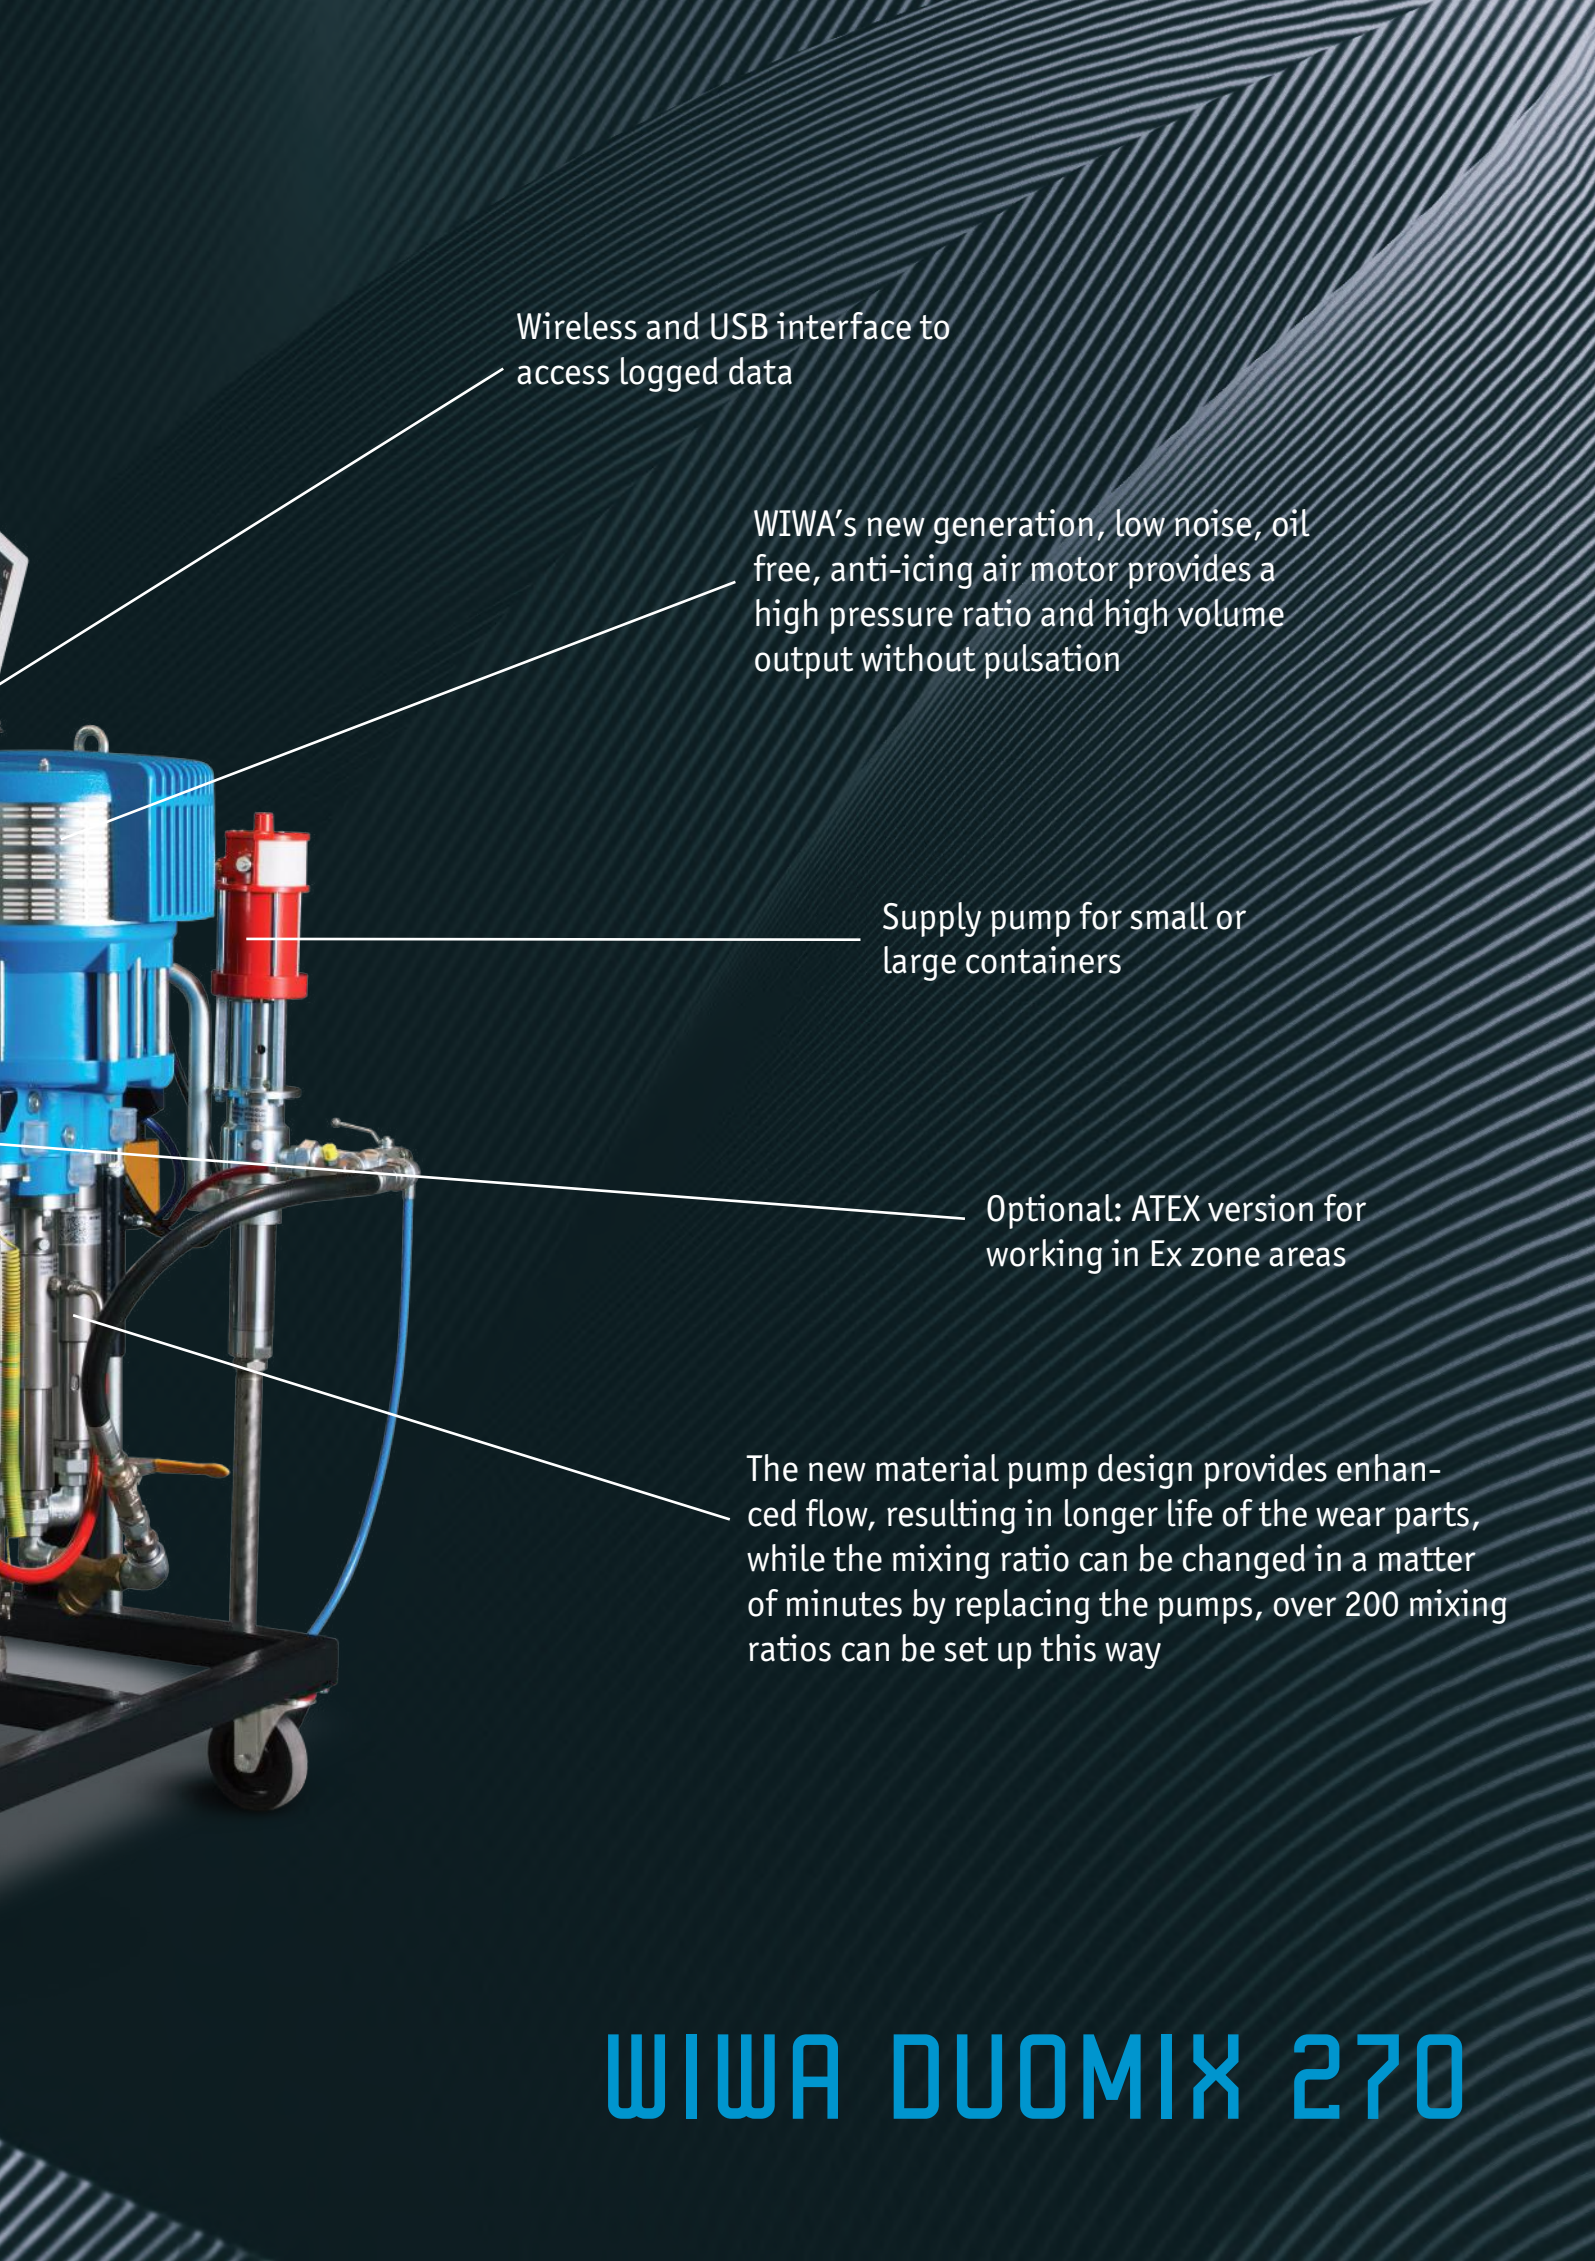
Mixing takes place directly on the unit or in an external mixing block connected by a (heated) hose package up to 100m away

When dealing with products with extreme mixing ratios, several static mixers can be combined



## Technical Data

Volumetric mixing ratio	1:1 to 10:1
Pressure ratio	20:1 to 80:1
Max. operating pressure	450 bar
Max. output per cycle	396 ccm
Max. output at 40 cycle	15,8 l

The image shows a blue and red industrial mixing machine, the WIWA DUOMIX 270, mounted on a black metal cart with a single visible wheel. The machine features a blue motor housing on the left and a red vertical component on the right. Various hoses and pipes are connected to the machine. The background is a dark blue with a pattern of white, curved, parallel lines that create a sense of depth and movement.

Wireless and USB interface to  
access logged data

WIWA's new generation, low noise, oil  
free, anti-icing air motor provides a  
high pressure ratio and high volume  
output without pulsation

Supply pump for small or  
large containers

Optional: ATEX version for  
working in Ex zone areas

The new material pump design provides enhanced flow, resulting in longer life of the wear parts, while the mixing ratio can be changed in a matter of minutes by replacing the pumps, over 200 mixing ratios can be set up this way

# WIWA DUOMIX 270