




TECHNICAL DATA SHEET



TS EN 1871,
TS EN 1436 ve
Karayolları Teknik
Şartnamesine
uygundur.

It has been
formulated to meet
the requirements
of the **EN 1871**,
EN 1436
and Highways
Technical

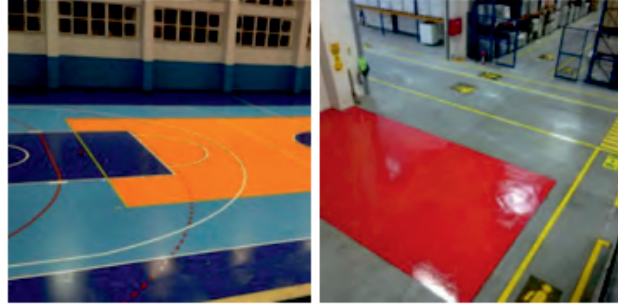

SIGNAFLOOR - WHITE

MMA BASED FLOOR COATING PAINT

- "Signafloor" two component floor coating paint is based on MMA resin. • This paint adheres to the surface with the reaction of components which are mixed at a certain rate.
- Signafloor has high physical and chemical resistance, abrasion resistance and easy cleaning.
- It can be used as top coat in multi-layer system or as self leveling. Film thickness can be applied between 1-4 mm.
- Even under heavy traffic, it keeps its high durability far long time.
- The paint should be applied within maximum 7 minutes after mixing the components each other.
- Signafloor can be used far factories, plants, ware houses, parking areas, faod plants, hospitals, chemistry and pharmaceutical industries and all industrial floors.

PRODUCT INFORMATION

- **Component A:** MMA based floor coating paint
- **Component B:** Hardener
- Application method: Please consult us.
- Product name: Signafloor

APPLICATION INFORMATION

Before the application of **Signafloor**, the area should be dry and away from dust, grease, and other dirt.

Use glove and mask during the application.

Surface Temperature: Between 10° C and 40 ° C

Maximum Humidity: %80

Dry Time: 20 min.(23 °C ve % 49 Humidity, 6 km/h wind)

PAINT CONSUMPTION AMOUNT

Paint	1,8 kg / m ² for 1 mm
-------	----------------------------------

Note: The values in the table are theoretical values.

Consumption amount can be changed according to the surface and weather conditions.

PHYSICAL PROPERTIES

- Color: White
- Viscosity (KU): 110 ± 10
- Density: 1,80 g / ml. ± 0,1

RAL 9016	RAL 5015	RAL 1023	RAL 6001
RAL 9017	RAL 2004	RAL 3020	RAL 7040

RAL kataloğundan seçilen renk kodlarına göre istenilen renklerde üretilmektedir. | It can be produced according to the color codes selected from the RAL catalogue.



TECHNICAL DATA SHEET

SIGNAFLOOR - WHITE

MMA BASED FLOOR COATING PAINT

PACKAGING AND STORAGE CONDITION

- **Component A:** 25 kg / Can
- **Component B:** 25 kg / Can
- At proper storage conditions, shelf life is 1 year.
- Store at closed areas, and get away from fire sources.